


Date tehnice pentru produs: DTWE075445

## Dulap de perete DTW, 7U H=370 x W=540 x D=450, 19"

ATENȚIE !!! - expedierea acestor produse prin curier se face doar pe răspunderea clientului, există riscul deteriorării sale în timpul transportului.

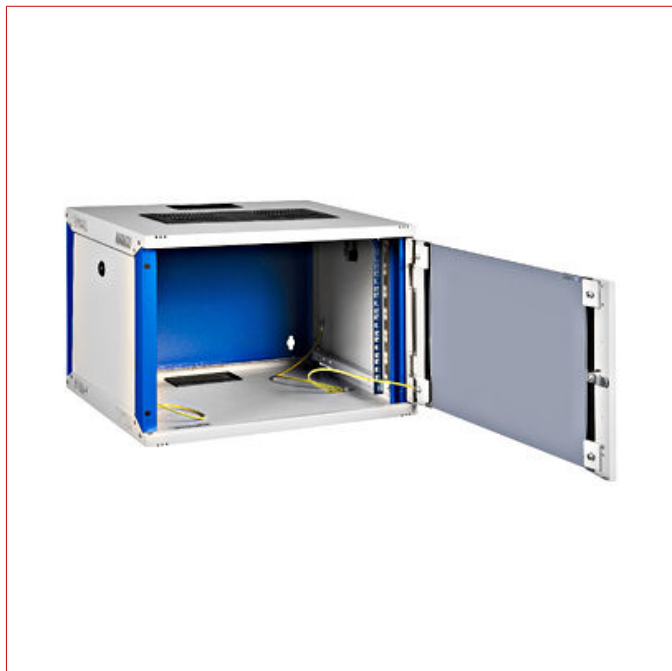

### SCHRACK-Info

Mainly used in offices and office-like environments, such as flats, single-family homes, etc. Suitable as a central distributor in small to medium-sized network installations, but also for use as a floor distributor (sub-distributor) in the horizontal area of structured cabling. The removable side panels allow convenient access to the installed components, even afterwards. For active cooling of the built-in components, optional DTLT fan units with one or two fans can be mounted in the roof.

- **Material:** Powder-coated steel sheet housing
- **Material thickness:**
  - Top and bottom chassis: 1.0mm
  - Corner profile: 1.0mm
  - Rails: 1.5mm
  - Front door (glass): 4.0mm
  - Rear panel: 1.0mm
  - Side panel: 0.8mm
- **Colour:**
  - RAL7035 (light grey)
  - Corner profile and rear panel: RAL5005 (signal blue)
- **Heights:** 4, 7, 9, 12 and 16U
- **Maximum load:** With even distribution: 80kg


- **Degree of protection:** IP20
- **Doors:** Glass door of safety glass 4mm including lock and 2 keys. Door hinged on the right. Conversion to left hinged possible. Opening angle of the door: approx. 200°.
- **Side panels:** removable and lockable
- **Rails:** 19" rails (2 pieces) in the front of the cabinet, galvanised, depth-adjustable
- **Cable entry options:** in roof and floor
  - The floor is provided with a plastic blank cover.
  - The roof is equipped with a brush entry.
- **Cooling:**
  - Passive cooling through ventilation slots and heat exchange with the outside area.
  - Active cooling by optional DTLT fans, which are easily and quickly inserted into the




## Fișe tehnice

|                                            |                                         |
|--------------------------------------------|-----------------------------------------|
| Lățime netă (mm)                           | 540,00                                  |
| Înălțime (mm)                              | 370,00                                  |
| Adâncime netă (mm)                         | 450,00                                  |
| Masă netă (kg.)                            | 11,60                                   |
| COD EAN                                    | 9004840868876                           |
| Temperatura minimă a mediului ambiant (°C) | 5                                       |
| Temperatura maximă a mediului ambiant (°C) | 40                                      |
| UV                                         | 7                                       |
| Culoare                                    | RAL 7035 / RAL 5005 (light grey / blue) |
| grad de protecție                          | IP20                                    |
| Încărcare maximă (kg.)                     | 80                                      |
| Serie                                      | S-RACK                                  |


## Desen dimensional: Dulap de perete DTW, 7U H=370 x W=540 x D=450, 19"

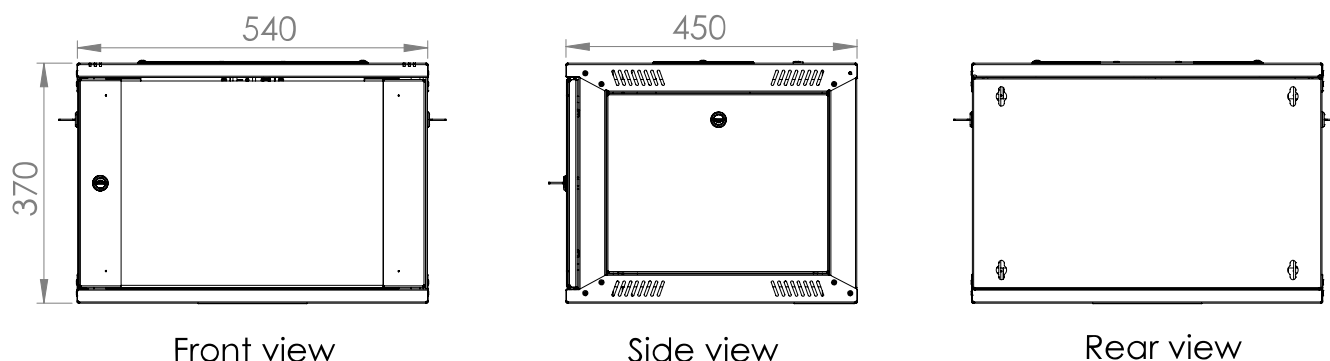

**Desen dimensional: Dulap de perete DTW, 7U H=370 x W=540 x D=450, 19"**

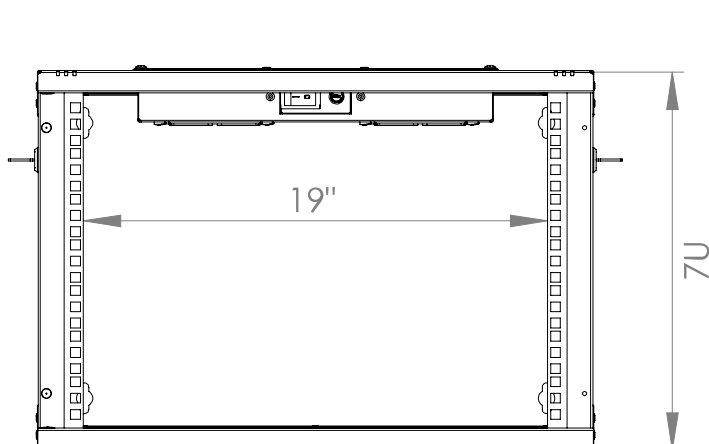


Front inside view

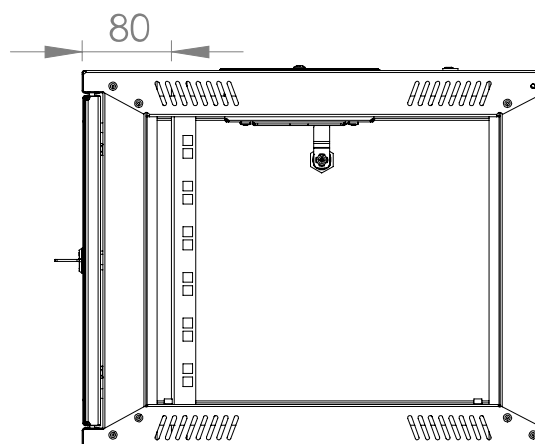


Side inside view

**Desen dimensional: Dulap de perete DTW, 7U H=370 x W=540 x D=450, 19"**

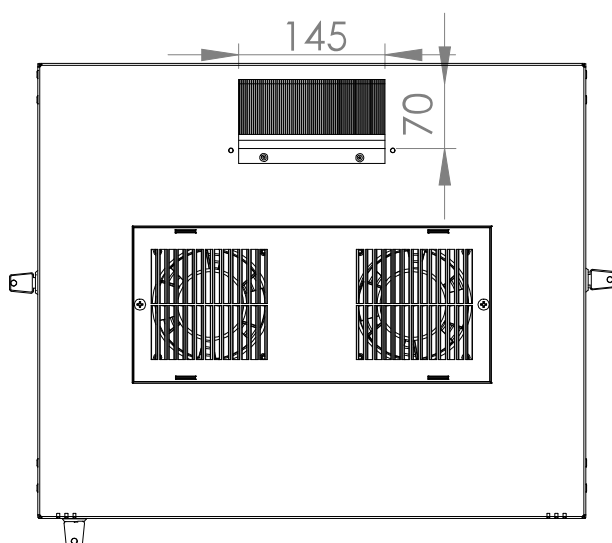


Top view

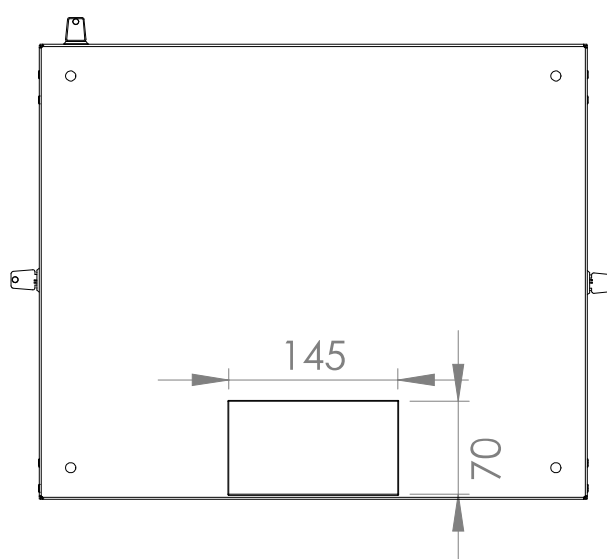


Bottom view

**Desen dimensional: Dulap de perete DTW, 7U H=370 x W=540 x D=450, 19"**

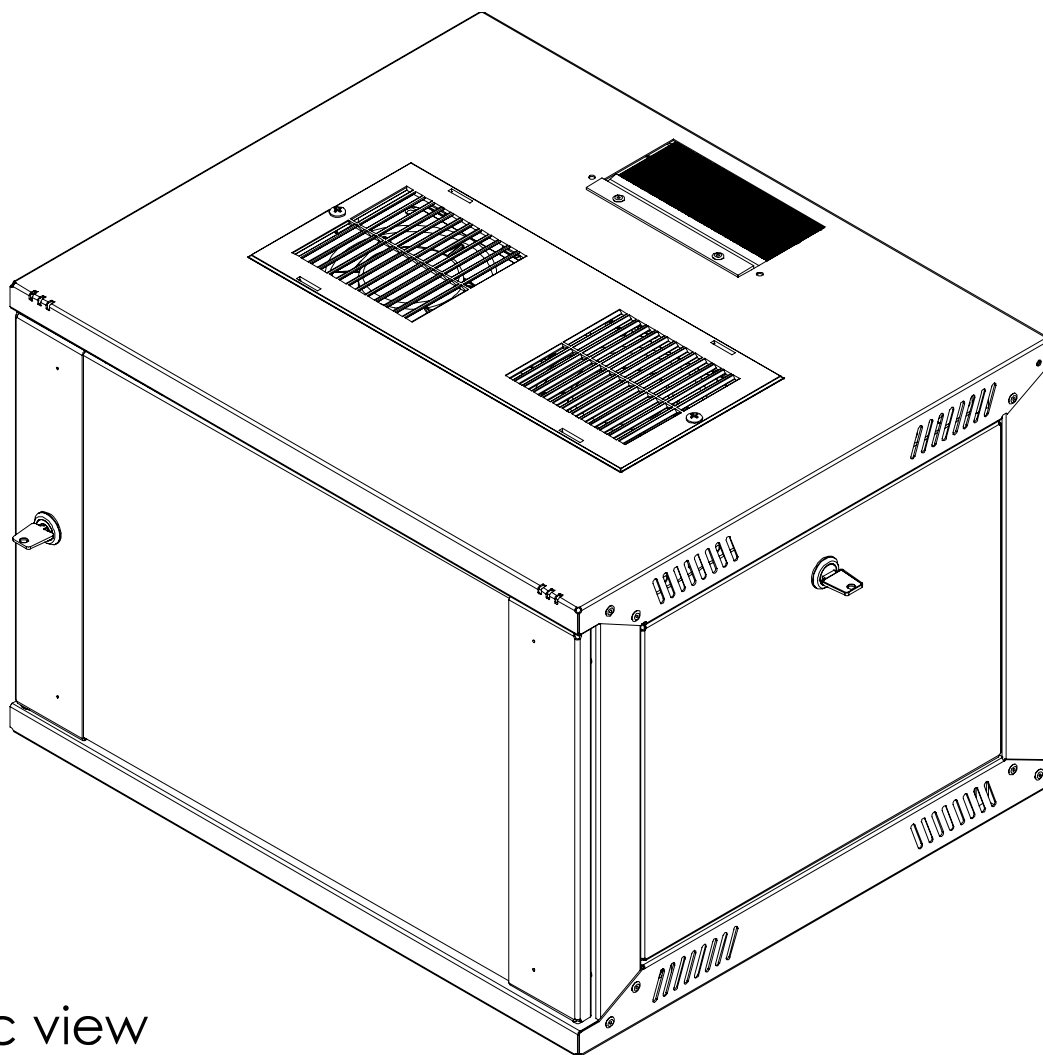

Isometric view

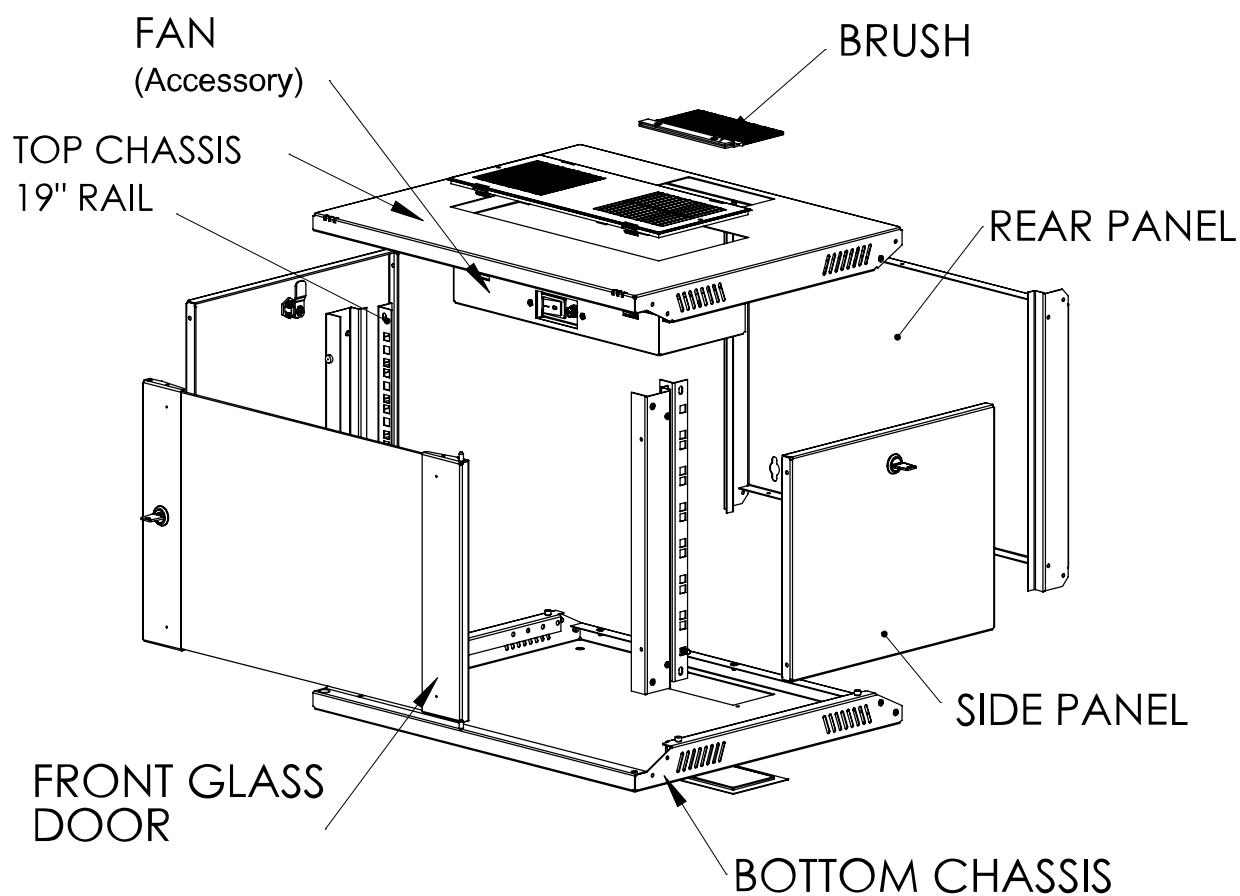**Desen dimensional: Dulap de perete DTW, 7U H=370 x W=540 x D=450, 19"**

Exploded view

## Tabel articole

| Descriere                                                                                                                                             | Cod comandă |
|-------------------------------------------------------------------------------------------------------------------------------------------------------|-------------|
| Dulap de perete DTW, 7U H=370 x W=540 x D=450, 19"                                                                                                    |             |
| ATENȚIE !!! - expedierea acestor produse prin curier se face doar pe răspunderea clientului, există riscul deteriorării sale în timpul transportului. | DTWE075445  |
| <b>Accesorii opționale</b>                                                                                                                            |             |
| Unitate de tavan cu 2 ventilatoare, DT/DTW, termostat analog gri deschis, instalare din exterior                                                      | DTLTR02A    |
| Unitate de tavan cu 2 ventilatoare, DT/DTW, comutator ON/OFF gri deschis, instalare din exterior                                                      | DTLTR02S    |
| Unitate de tavan cu 1 ventilator, DT/DTW, termostat analogic gri deschis, instalare din exterior                                                      | DTLTR01A    |
| Unitate de tavan cu 1 ventilator, DT/DTW, comutator ON/OFF gri deschis, instalare din exterior                                                        | DTLTR01S    |
| Tavă fixă, 1U, sarcină 30 Kg, D=300mm, fixare în 2 puncte montaj 2 puncte                                                                             | DTFT1300    |
| Patchpanel pt. 24 module TOOLLESS LINE, 1UH, 19", RAL7035                                                                                             | HSER0240GS  |
| Organizator 19" 1U, 5 inele metalice, RAL7035                                                                                                         | DTBC105R    |
| Set fixare profil 19" (20buc. Șurub+piuliță+șaiabă)                                                                                                   | DTSRA020    |
| Switch 24xRJ45 10/100/1000,silențios,f.vent.,alim.intern Carcasă metalică, 19"                                                                        | QLGSW2457   |
| PDU 19", 9xSchuko, profil ALU 1U, cablu conexiune 2m,RAL7035                                                                                          | IU070114    |
| PDU 19",7xSchuko+prot suprat, prof PVC 1,25U,cabl 2m,RAL7035                                                                                          | IU070113    |
| PDU 9x Schuko, 19", 1U, cablu 2m,comutator on/off negru,ALU ALU Profil                                                                                | Q7070114-A  |
| PDU 19", 7xSchuko, Comutator, protecție supratensiune, 1U cablu 2m, negru                                                                             | Q7070113-A  |