

Date tehnice pentru produs: AT201040--

# Dulap înseriabil 1 ușă IP55 H=2000 L=1000 A=400 mm

Dulap oțel RAL7035, cu placă de montaj, ușă cu închidere în 4 puncte



## SCHRACK-Info

- **Material** : Frame: 1.5 mm sheet steel. Doors: Single door and double door: 1.5 mm sheet steel. Rear-, roof- and side-panels: 1.2 mm sheet steel
- **Mounting plate** : 3 mm galvanised sheet steel. Double folded, mounted in the enclosure, fully adjustable in depth in 25 mm increments
- **Bottom plates** : 1.5 mm galvanised sheet steel, consists of
  - three-part bottom plate at depths 400 and 500 mm and
  - four-part bottom plate at depth 600 mm
  - five-part bottom plate at depth 800 mm
- **Frame** : Folded and seam welded reversed open profile with 25 mm hole pattern according to DIN 43660. Including integrated external hole pattern
- **Door** : On single door enclosures, the door is mounted on four double-sided hinges for right-hand opening (= hinged right). Doors for left-hand opening (= hinged left) have to be ordered separately. On double door enclosures, hinges are not reversible. All door panels include the door mounting frame with 25 mm hole pattern. The left Z-wing is locked separately with an inner three-point lock
- **Lock** : Four-point rod lock with push-pull handle with spring adjustment and half cylinder lock 5333 (identical key), does not slide inward. The standard lock can be exchanged for profile half cylinder (DIN cylinder) and other inserts from the range of accessories. Double doors are designed with a left-side inner pivot lever
- **Rear panel** : Mounted with M6 torx screws. Replacement against additional door from the back side is possible. For 1600 mm wide enclosures the rear panel is divided

- **Side panels** : ATSW... supplied in pairs as accessory
- **Roof panel** : Removable
- **Earthing** : All panels are earthed through their fittings and are equipped with a separate earthing stud
- **Degree of protection** : Single door IP55 and double door IP54
- **Impact resistance** : IK10
- **Finish** : Textured powder coating
- **Color** : RAL7035 (Light grey)
- **Delivery includes** : Frame with fitted door, rear panel, roof panel, bottom plates, mounting plate with fixing material for the nearest position of the rear panel and earthing studs. Delivered on a pallet with equal width as the enclosure to enable buying while still on the pallet. All packing material is recyclable. In 400 mm wide enclosures a mounting plate, bottom plates and door frame are not included
- **Mounting requirement** : Standard delivery ready for combined installation. For stand-alone installation add side panels




## Fișe tehnice

Lățime netă (mm)	1.000,00
Înălțime (mm)	2.000,00
Adâncime netă (mm)	400,00
Masă netă (kg.)	144,40
Temperatura minimă a mediului ambiant (°C)	-20
Temperatura maximă a mediului ambiant (°C)	70
Grosimea peretelui ușii (mm)	1,50
Înălțimea contrapanoului (mm)	1888
Material	tablă de oțel
Culoare	Gri deschis
Număr de plăci de bază	3
Load capacity per door (kg.)	50
Număr de uși	1
Înălțime (mm)	2000
Adâncime (mm)	400
grad de protecție	IP55
Clasă de protecție	I
Grosimea peretelui corpului (mm)	1,50
Contrapanouri	galvanized sheet steel 3mm
Lățime placă de bază (mm)	755
Lățimea contrapanoului (mm)	888
Lățime (mm)	1000
Accesorii opționale	IU006519CZ;ATSW2004--;ATSOC104--;ATSOC204--;ATSOT041--;A TSOB101--;ATCCI060--;ACLE9301--;ASDRA400--;BK14004-- B;BK14005--A;IL14035--A;IL14037---
Categorie produs	Modular enclosure
Total Load Capacity (kg.)	1000
Mounting Plate Load Capacity (kg.)	500

## Fișe tehnice - Continuare

Adâncimea contrapanoului (mm)	3
disipare (W)	-924,00

## Dimension drawing

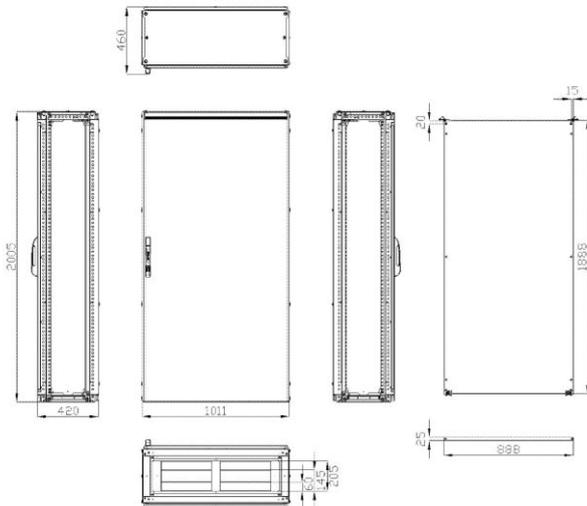

## Tabel articole

Descriere	Cod comandă
Dulap inseriabil 1 ușă IP55 H=2000 L=1000 A=400 mm	AT201040
Dulap oțel RAL7035, cu placă de montaj, ușă cu închidere în 4 puncte	
<b>Accesorii opționale</b>	
LED ligh for EC, infra	IU006519CZ
2 panouri laterale H=2000 A=400 mm, tablă 1.2 mm RAL7035	ATSW2004
Plintă, Set 4 colțare 100mm, RAL7012	ATSOC104
Plintă, Set 4 colțare 200mm, RAL7012	ATSOC204
Plintă, Set laterale 400x100mm, RAL7012	ATSOT041
Plintă, Set față și spate 1000x100mm RAL7012, 2 buc. în furnitură	ATSOB101
Kit inseriere dulapuri AT cu 4 piese de legătură cu 4x piese legătură, 2 urechi de ridicat, garnitură de 5,6m, 8xM6 suruburi de fixare și accesorii de montaj	ATCCI060
Urechi de ridicare M12 pt. dulapuri AC și KC 1 Set=4 piese	ACLE9301
Suport documentație, autoadeziv, A4	ASDRA400
DIN-rail low, unperforated, sendzimir zinced Price per piece	BK14004--B
Șină omega din oțel zincat, 2000x35x7,5mm, perforată Pretul este pe bucata de 2 m.	BK14005--A
DIN-rail high, unperforated, sendzimir zinced	IL14035--A
DIN-rail high, unperforated, sendzimir zinced	
DIN-rail high, Long Hole 18x6.3mm, sendzimir zinced Price per piece	IL14037