

Date tehnice pentru produs: WSAIE8060R

Cadru modular 5 rânduri a câte 28M, pentru Î=800 L=600mm

pe balamale, cu șine DIN, compatibile cu WSA8060210, WSA8060211, WSA8060260, WSA8060300, WSA8060305 și WSA8060400



SCHRACK-Info

- For installation of modular devices on DIN-rails
- The distance between the DIN-rails (centre-centre) is 140mm
- The usable depth between the front cover of the WSAIE modular chassis and the WSA enclosure door is 82.5mm
- Material thickness: 1.2mm
- Degree of protection: IP3XD according to IEC 60529
- Color: RAL 7035 (Light grey)
- Supply includes:
 - 1 Piece of front door with 45mm cutouts
 - 2 Pieces of vertical profiles
 - 2 Pieces of closures (top/bottom)
 - DIN-rails
 - Mounting material


Fișe tehnice

Lățime netă (mm)	600,00
Înălțime (mm)	800,00

Fișe tehnice - Continuare

Adâncime netă (mm)	61,00
Masă netă (kg.)	9,50
Culoare	RAL 7035 (Gri deschis)
Update-Link	https://www.schrack.at/schrack-technik/produktisiko-melden

Dimensioned drawing: WSA modular chassis 6-rows each 27MW, for H=800 W=600mm

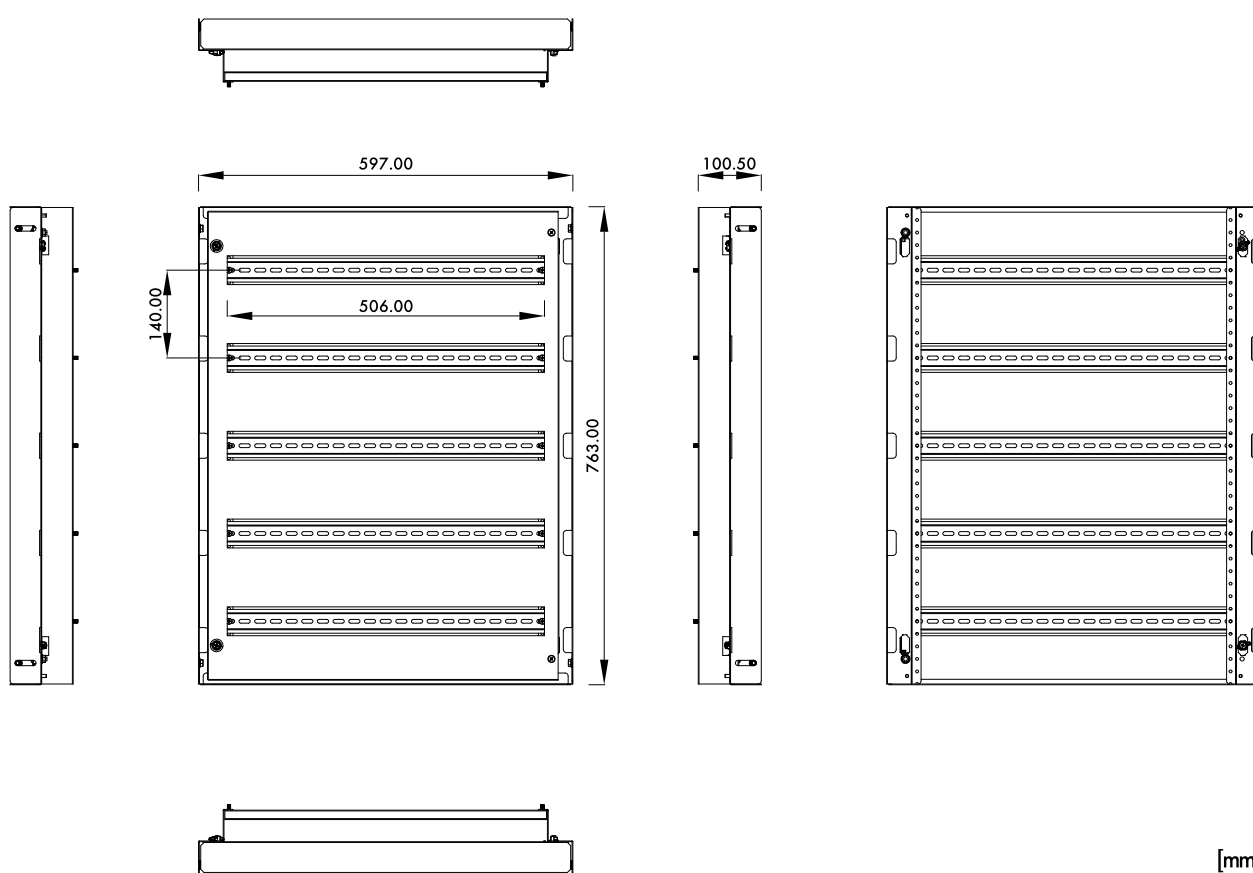

Tabel articole

Descriere	Cod comandă
Cadru modular 5 rânduri a câte 28M, pentru Î=800 L=600mm pe balamale, cu șine DIN, compatibile cu WSA8060210, WSA8060211, WSA8060260, WSA8060300, WSA8060305 și WSA8060400	WSAIE8060R
Accesorii opționale	
Plastic quarter turn lock for WSAIExxxxR	WSAIE00BL